

DESCRIPTION

- Metal Wand
- Reflex™ pulldown system offers smoother operation, easy movement and secure docking
- Powerdean
- Duralock™ quick connect installation
- Metal construction with various finishes identified by suffix
- Pulldown spray with 68" braided hose
- High arc spout provides height and reach to fill or clean large pots while pullout wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Flexible supply lines with 3/8" compression fittings
- Includes F9800 filtration system

OPERATION

- Decorative and non-decorative handle lever
- Three function spray wand: unfiltered stream, unfiltered spray and filtered laminar stream
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Temperature controlled by 100° arc of handle travel

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi for unfiltered, 0.7 gpm (2.6 L/min) for filtered

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirement referenced therein including NSF61/9 & 372
- Certified by IAPMO R&T to NSF/ANSI 372 for Low Lead Content and NSF/ANSI 42, 53 & 401 and CSA B483.1 for the claims enumerated on the Performance Data Sheet
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- **ADA**  for lever handles
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations




Haelyn™

3-in-1 Water Filtration Pulldown Kitchen Faucet

MODELS: F87627 Series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1, 2, 3 or 4 HOLES, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER)

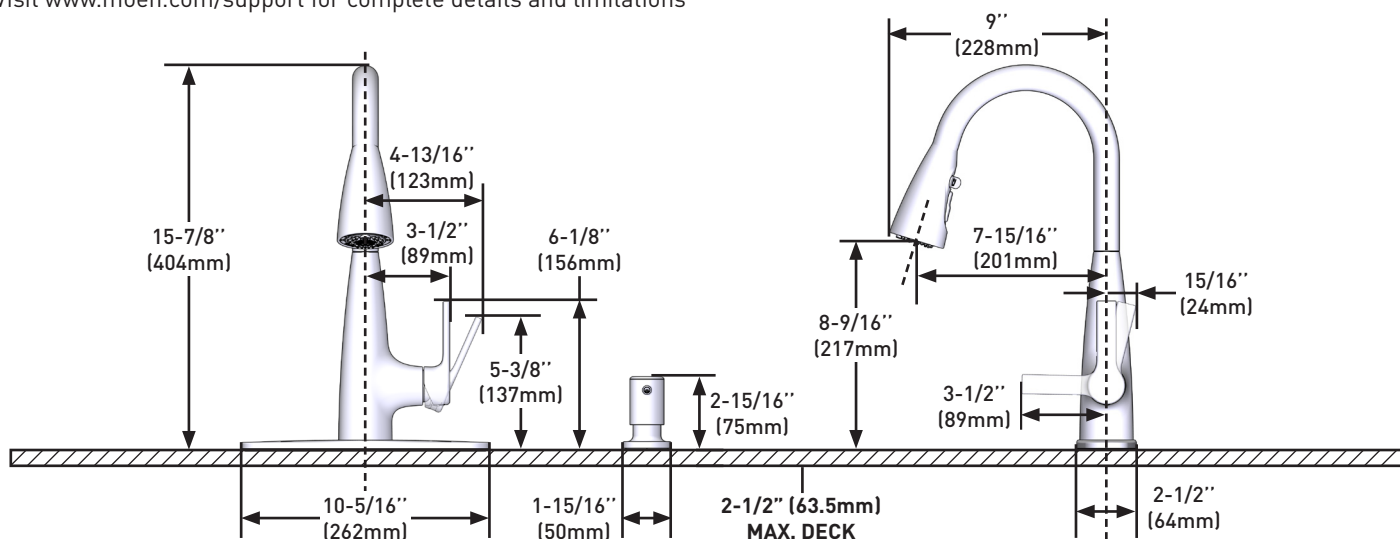

CRITICAL DIMENSIONS DO NOT SCALE